


RM10

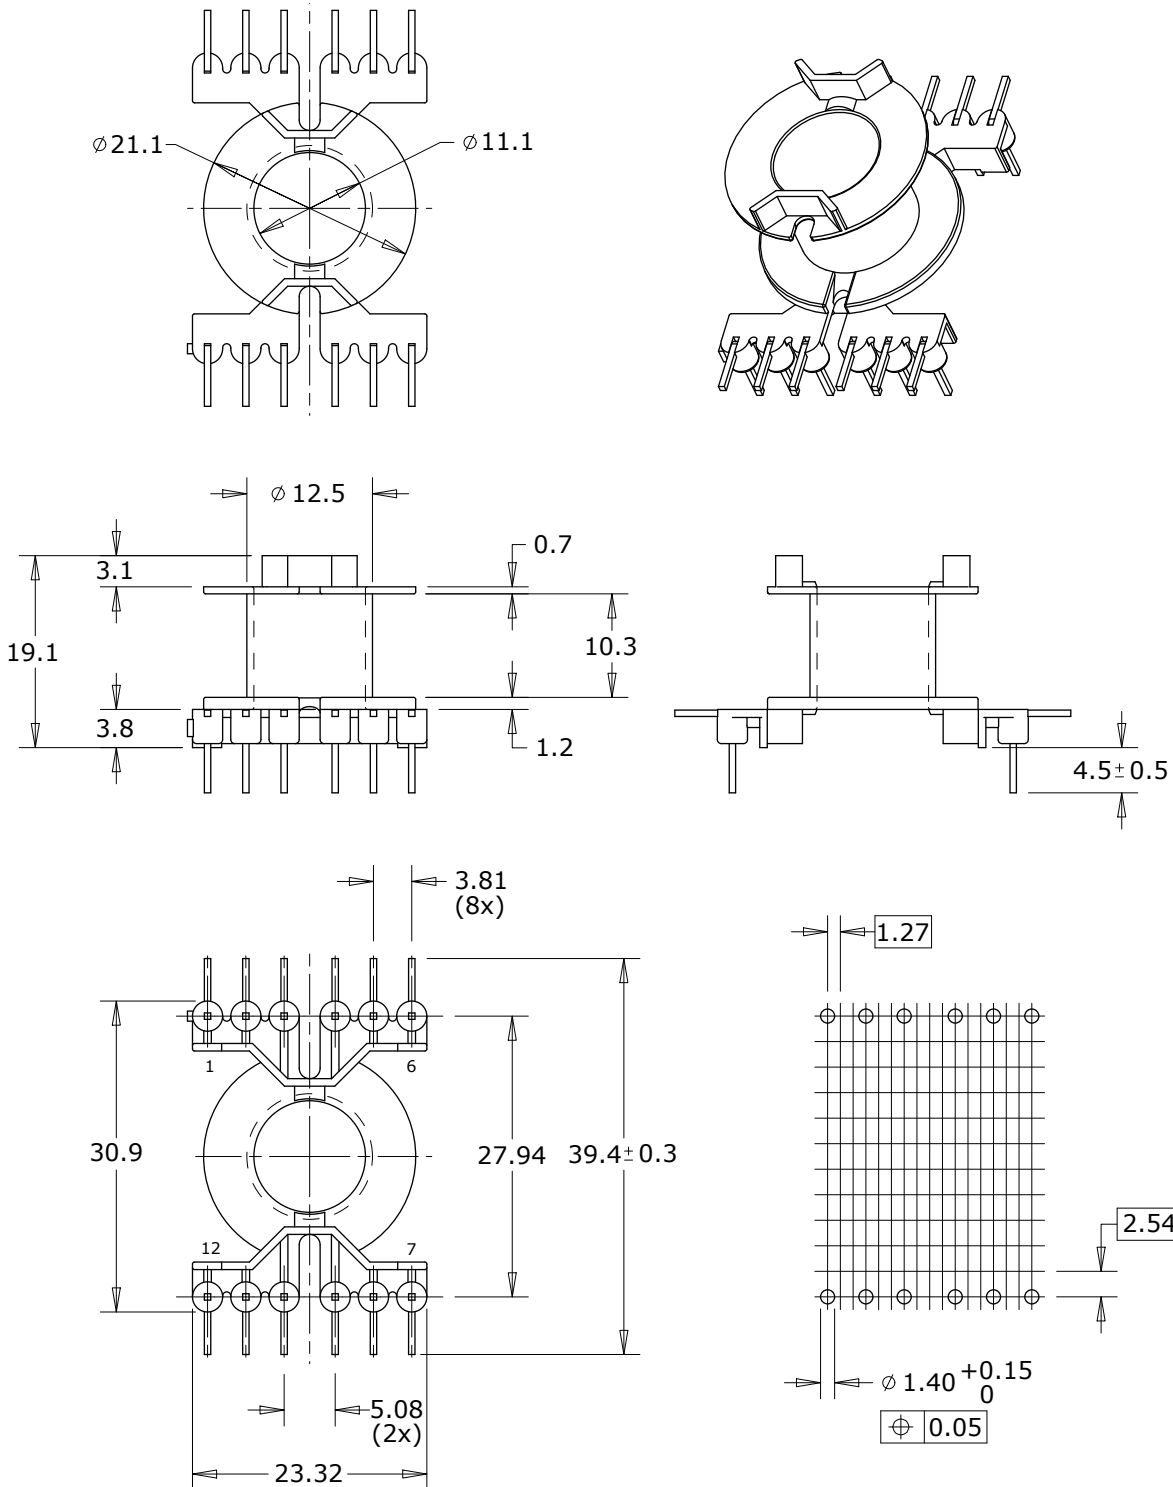

Dimensions in millimetres

DT152 Iss. 4

| Coil Former | |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Coil former material | Polyethylene terephthalate (PET), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41938 |
| Resistance to soldering heat | "IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 deg. C, 3.5 s |
| Pin material | 0.64 Sq. copper clad steel wire (ASTM.B.227) - Tin (Sn) plated |
| Solderability | "IEC 60068-2-20", Part 2, Test Ta, method 1, 235 deg. C, 2 s |
| Pin push out force | 1.5 Kg Minimum |
| Part number | RM10V1S12LP-00 |

